

<b>Series:</b> <b>KRDX</b>	<b>Discharge Bore:</b> <b>80 - 100mm</b>	<b>Motor Output / Pole:</b> <b>3.7 - 7.5kW / 4-pole</b>
-------------------------------	---	--



The KRDX-series is a submersible three-phase heavy-duty explosion-proof slurry pump driven by a 4-pole motor. It is equipped with a high-chromium cast iron agitator that assists the smooth suction of the settled material. Among other parts subject to wear, impellers and suction plates are made of high-chromium cast iron, with the pump casing and motor frame made of ductile cast iron, which provides excellent wear resistance for both types of parts. The top discharge, side flow design assures efficient motor cooling even when it operates with its motor exposed to air.



**Explosion-proof Code**  
IECEX: Ex d I Mb

Temperature range of Ambient and Liquid: 0 to 40 °C  
The pump should be operated with cooling by pumped liquid.  
Please make sure the pump casing is fully submerged in the water.

**Selection Table**

Model	Discharge Bore mm	Motor Output kW	Phase	Starting Method	Pole	Dry Weight kg
KRDX33.7-50	80	3.7	3-phase	Direct on Line	4	155
KRDX45.5-50	100	5.5	3-phase	Direct on Line	4	175
KRDX47.5-50	100	7.5	3-phase	Direct on Line	4	186

**Performance Curves**

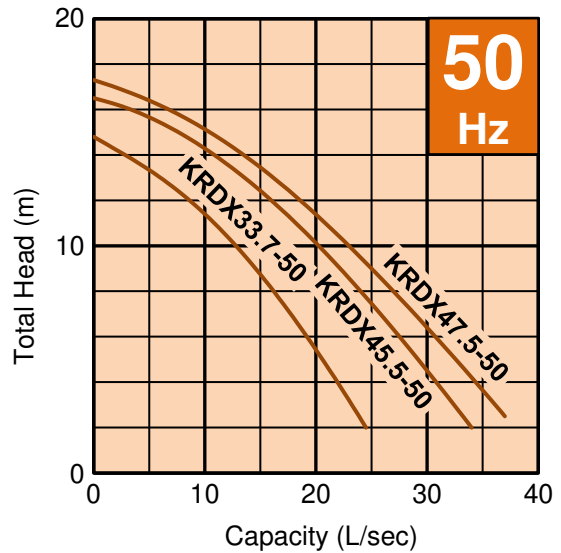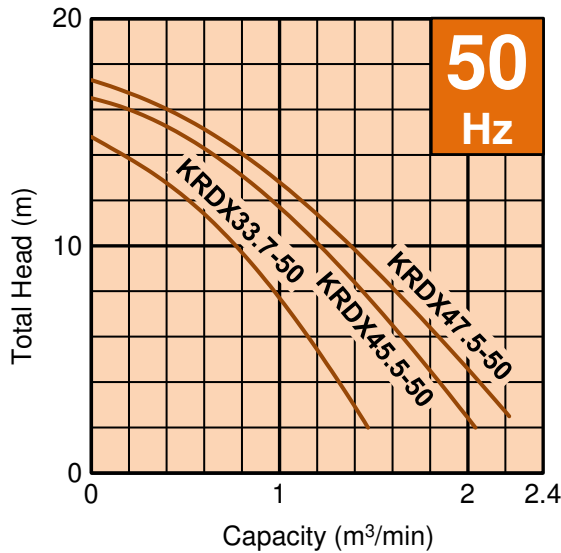

SPECIFICATIONS	Model	KRD-series
	KRD <b>X33.7-50</b>	3.7kW, 3-phase
<p><b>Type of Pump</b> Submersible explosion-proof slurry pump for construction and foundation works, mining, quarries, etc.</p> <p><b>Explosion-proof Code</b> IECEX: Ex d I Mb</p> <p><b>Type of Fluid</b> Water containing sand, mud, and slurry Specific Gravity 1.0 ~ 1.1 (less than 15% Wt. of sand)  Temperature: 0 to 40°C</p> <p><b>Discharge Bore &amp; Connection</b> 80mm(3"), BSPT Male Threaded Coupling</p> <p><b>Motor Output</b> 3.7kW</p> <p><b>Power Supply</b> Three-phase</p> <p><b>Starting Method</b> Direct on Line</p> <p><b>Motor</b> Continuous-duty rated (with cooling by pumped water), flame-proof enclosure, dry-type induction motor  Insulation Class: H Degree of Protection: IP68  No. of Poles &amp; Speed (Synchronous Speed): 4-pole, 1500min<sup>-1</sup> (50Hz)  Power Supply Voltages &amp; Rated Currents: 50Hz 415V - (8.0A)            1000V - 3.3A</p> <p><b>Power Cable</b> CPE sheathed, Type 2S (indiv. screened), 1.1kV Cable PLATINUM<sup>®</sup>, TY2S3G2.5 3x2.5 + 3x1.0ST (cut-off 2x1.0ST) Standard Length: 20m x 1 cable 3 x 2.5mm<sup>2</sup> + GC control + Ground, OD. 17.3~18.3mm (acceptable Macey<sup>®</sup> 4-pin Plug)</p> <p><b>Dry Weight</b> (excluding cable) 155kg</p>	<p><b>Impeller</b> Semi-open impeller made of high-chromium cast iron  Solids Passage 50Hz - <math>\phi</math>21mm</p> <p><b>Agitator</b> High-chromium cast iron</p> <p><b>Cable Entry with Anti-Wicking Block</b> Watertight cable entry with strain-relief device. The anti-wicking block prevents water incursion due to capillary action should the power cable be damaged or the end submerged.</p> <p><b>Bearing</b> Permanently lubricated, deep-groove, non-contact sealed ball bearings  Upper Bearing: 6306LLB Lower Bearing: 6308LLB</p> <p><b>Shaft</b> 410 stainless steel</p> <p><b>Shaft Seal</b> (Mechanical Seal) Furnished with 2 mechanical seals located in oil chamber. Both upper and lower seal faces always run in a clean environment.  Upper Seal Face: SiC + SiC Lower Seal Face: SiC + SiC</p> <p><b>Labyrinth Ring &amp; Shaft Sleeve</b> Made of alloy tool steel, equipped to provide a better countermeasure against wear caused by high pressure generated in the casing.</p> <p><b>Pressure Relief Ports</b> Protect the mechanical seals against excessive pressure, and also protect the seal faces from abrasive by drawing the particles away.</p> <p><b>Type of Lubricating Oil &amp; Volume</b> Turbine Oil (ISO VG32), 1050ml</p> <p><b>Motor Protection Device</b> <b>Miniature Thermal Protectors &amp; Ground-Check Diode</b> A miniature thermal protector is embedded in each winding of the motor. The MTPs are connected with a diode in series into the Ground-Check circuit in the motor. If excessive heat builds up and the bimetal strip opens, Ground-fault happens, the power supply can be shut off by using an external control panel.  Diode :    1N5408 (3A-1000V)</p>	
<p><b>Optional Accessories</b> 80mm(3") Hose Nipple Impeller Nut for non-agitation</p>		
<b>TSURUMI AUSTRALIA PTY LTD</b>		

SPECIFICATIONS	Model	KRD-series
	KRD45.5-50	5.5kW, 3-phase
<p><b>Type of Pump</b> Submersible explosion-proof slurry pump for construction and foundation works, mining, quarries, etc.</p> <p><b>Explosion-proof Code</b> IECEX: Ex d I Mb</p> <p><b>Type of Fluid</b> Water containing sand, mud, and slurry Specific Gravity 1.0 ~ 1.1 (less than 15% Wt. of sand)  Temperature: 0 to 40°C</p> <p><b>Discharge Bore &amp; Connection</b> 100mm(4"), BSPT Male Threaded Coupling</p> <p><b>Motor Output</b> 5.5kW</p> <p><b>Power Supply</b> Three-phase</p> <p><b>Starting Method</b> Direct on Line</p> <p><b>Motor</b> Continuous-duty rated (with cooling by pumped water), flame-proof enclosure, dry-type induction motor  Insulation Class: H Degree of Protection: IP68  No. of Poles &amp; Speed (Synchronous Speed): 4-pole, 1500min<sup>-1</sup> (50Hz)  Power Supply Voltages &amp; Rated Currents: 50Hz 415V - (11.5A)      1000V - 4.8A</p> <p><b>Power Cable</b> CPE sheathed, Type 2S (indiv. screened), 1.1kV Cable PLATINUM<sup>®</sup>, TY2S3G2.5 3x2.5 + 3x1.0ST (cut-off 2x1.0ST) Standard Length: 20m x 1 cable 3 x 2.5mm<sup>2</sup> + GC control + Ground, OD. 17.3~18.3mm (acceptable Macey<sup>®</sup> 4-pin Plug)</p> <p><b>Dry Weight</b> (excluding cable) 175kg</p>	<p><b>Impeller</b> Semi-open impeller made of high-chromium cast iron  Solids Passage 50Hz - <math>\phi</math>28mm</p> <p><b>Agitator</b> High-chromium cast iron</p> <p><b>Cable Entry with Anti-Wicking Block</b> Watertight cable entry with strain-relief device. The anti-wicking block prevents water incursion due to capillary action should the power cable be damaged or the end submerged.</p> <p><b>Bearing</b> Permanently lubricated, deep-groove, non-contact sealed ball bearings  Upper Bearing: 6306LLB Lower Bearing: 6308LLB</p> <p><b>Shaft</b> 410 stainless steel</p> <p><b>Shaft Seal</b> (Mechanical Seal) Furnished with 2 mechanical seals located in oil chamber. Both upper and lower seal faces always run in a clean environment.  Upper Seal Face: SiC + SiC Lower Seal Face: SiC + SiC</p> <p><b>Labyrinth Ring &amp; Shaft Sleeve</b> Made of alloy tool steel, equipped to provide a better countermeasure against wear caused by high pressure generated in the casing.</p> <p><b>Pressure Relief Ports</b> Protect the mechanical seals against excessive pressure, and also protect the seal faces from abrasive by drawing the particles away.</p> <p><b>Type of Lubricating Oil &amp; Volume</b> Turbine Oil (ISO VG32), 1050ml</p> <p><b>Motor Protection Device</b> <b>Miniature Thermal Protectors &amp; Ground-Check Diode</b> A miniature thermal protector is embedded in each winding of the motor. The MTPs are connected with a diode in series into the Ground-Check circuit in the motor. If excessive heat builds up and the bimetal strip opens, Ground-fault happens, the power supply can be shut off by using an external control panel.  Diode :    1N5408 (3A-1000V)</p>	
<p><b>Optional Accessories</b> 100mm(4") Hose Nipple Impeller Nut for non-agitation</p>		
<b>TSURUMI AUSTRALIA PTY LTD</b>		

SPECIFICATIONS	Model	KRD-series
	KRD <b>X47.5-50</b>	<b>7.5kW, 3-phase</b>
<p><b>Type of Pump</b> Submersible explosion-proof slurry pump for construction and foundation works, mining, quarries, etc.</p> <p><b>Explosion-proof Code</b> IECEX: Ex d I Mb</p> <p><b>Type of Fluid</b> Water containing sand, mud, and slurry Specific Gravity 1.0 ~ 1.1 (less than 15% Wt. of sand)  Temperature: 0 to 40°C</p> <p><b>Discharge Bore &amp; Connection</b> 100mm(4"), BSPT Male Threaded Coupling</p> <p><b>Motor Output</b> 7.5kW</p> <p><b>Power Supply</b> Three-phase</p> <p><b>Starting Method</b> Direct on Line</p> <p><b>Motor</b> Continuous-duty rated (with cooling by pumped water), flame-proof enclosure, dry-type induction motor  Insulation Class: H Degree of Protection: IP68  No. of Poles &amp; Speed (Synchronous Speed): 4-pole, 1500min<sup>-1</sup> (50Hz)  Power Supply Voltages &amp; Rated Currents: 50Hz 415V - (15.3A)      1000V - 6.3A</p> <p><b>Power Cable</b> CPE sheathed, Type 2S (indiv. screened), 1.1kV Cable PLATINUM<sup>®</sup>, TY2S3G2.5 3x2.5 + 3x1.0ST (cut-off 2x1.0ST) Standard Length: 20m x 1 cable 3 x 2.5mm<sup>2</sup> + GC control + Ground, OD. 17.3~18.3mm (acceptable Macey<sup>®</sup> 4-pin Plug)</p> <p><b>Dry Weight</b> (excluding cable) 186kg</p>	<p><b>Impeller</b> Semi-open impeller made of high-chromium cast iron  Solids Passage 50Hz - <math>\phi</math>33mm</p> <p><b>Agitator</b> High-chromium cast iron</p> <p><b>Cable Entry with Anti-Wicking Block</b> Watertight cable entry with strain-relief device. The anti-wicking block prevents water incursion due to capillary action should the power cable be damaged or the end submerged.</p> <p><b>Bearing</b> Permanently lubricated, deep-groove, non-contact sealed ball bearings  Upper Bearing: 6306LLB Lower Bearing: 6309LLB</p> <p><b>Shaft</b> 410 stainless steel</p> <p><b>Shaft Seal</b> (Mechanical Seal) Furnished with 2 mechanical seals located in oil chamber. Both upper and lower seal faces always run in a clean environment.  Upper Seal Face: SiC + SiC Lower Seal Face: SiC + SiC</p> <p><b>Labyrinth Ring &amp; Shaft Sleeve</b> Made of alloy tool steel, equipped to provide a better countermeasure against wear caused by high pressure generated in the casing.</p> <p><b>Pressure Relief Ports</b> Protect the mechanical seals against excessive pressure, and also protect the seal faces from abrasive by drawing the particles away.</p> <p><b>Type of Lubricating Oil &amp; Volume</b> Turbine Oil (ISO VG32), 1050ml</p> <p><b>Motor Protection Device</b> <b>Miniature Thermal Protectors &amp; Ground-Check Diode</b> A miniature thermal protector is embedded in each winding of the motor. The MTPs are connected with a diode in series into the Ground-Check circuit in the motor. If excessive heat builds up and the bimetal strip opens, Ground-fault happens, the power supply can be shut off by using an external control panel.  Diode :    1N5408 (3A-1000V)</p>	
<p><b>Optional Accessories</b> 100mm(4") Hose Nipple Impeller Nut for non-agitation</p>		
<b>TSURUMI AUSTRALIA PTY LTD</b>		

**DIMENSIONS**



Model

**KRDX33.7/45.5/47.5-50**

**KRDX-series**

**80 - 100mm**

C.W.L. : Continuous Running Water Level  
Do not operate the pump below the C.W.L.

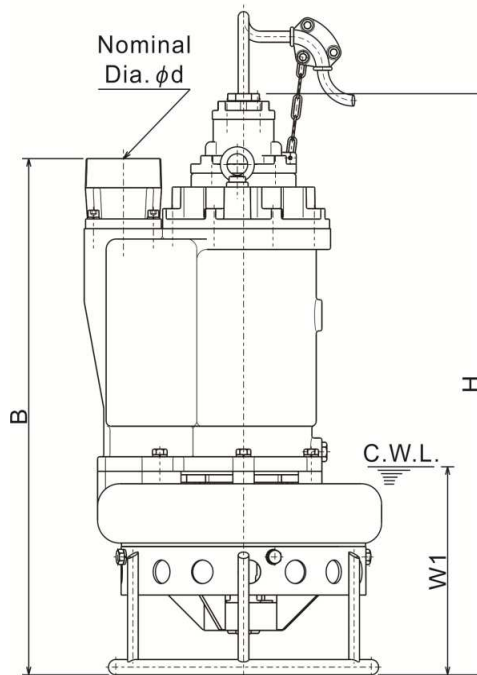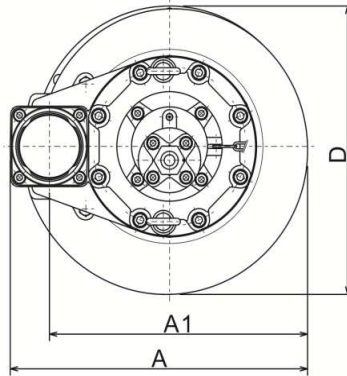

Unit: mm

Model	d	A	A1	B	D	H	W1
KRDX33.7-50	80	415	356	701	369	829	290
KRDX45.5-50	100	446	387	745	416	838	300
KRDX47.5-50	100	446	387	775	416	868	300